

# CONSTRUCTION DETAIL


## TWO STORY WOOD FRAME ON CONCRETE FOUNDATION

Roof Materials: \_\_\_\_\_  
 Sheathing (type & thick.) = \_\_\_\_\_  
 Roofing (type) = \_\_\_\_\_  
 Paper (lb.) = \_\_\_\_\_

Roof pitch = \_\_\_\_\_

Trusses or rafters:  
 Size & spacing = \_\_\_\_\_

Insulation R-value = \_\_\_\_\_

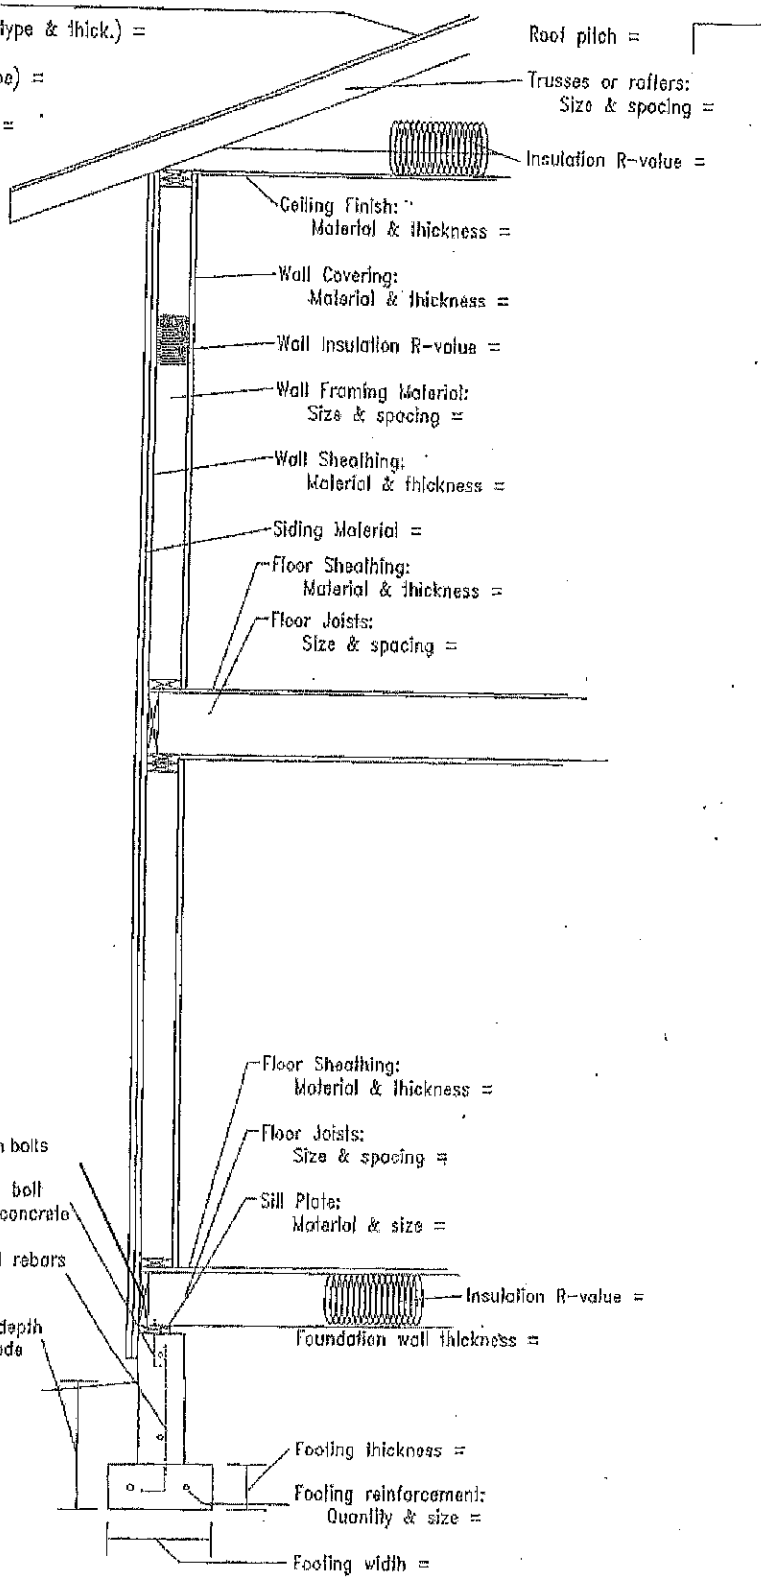

Ceiling Finish: \_\_\_\_\_  
 Material & thickness = \_\_\_\_\_

Wall Covering:  
 Material & thickness = \_\_\_\_\_

Wall Insulation R-value = \_\_\_\_\_

Wall Framing Material:  
 Size & spacing = \_\_\_\_\_

Wall Sheathing:  
 Material & thickness = \_\_\_\_\_

Siding Material = \_\_\_\_\_

Floor Sheathing:  
 Material & thickness = \_\_\_\_\_

Floor Joists:  
 Size & spacing = \_\_\_\_\_

Floor Sheathing:  
 Material & thickness = \_\_\_\_\_

Floor Joists:  
 Size & spacing = \_\_\_\_\_

Sill Plate:  
 Material & size = \_\_\_\_\_

Insulation R-value = \_\_\_\_\_

Foundation wall thickness = \_\_\_\_\_

Footing thickness = \_\_\_\_\_

Footing reinforcement:  
 Quantity & size = \_\_\_\_\_

Footing width = \_\_\_\_\_

3" X 3" Washers on bolts

Min. 1/2" anchor bolt  
 embedded 7" in concrete

Min. 1/2" vertical rebars  
 max. 32" o.c.

Min. 32" footing depth  
 below finished grade

NAME: \_\_\_\_\_

ADDRESS: \_\_\_\_\_

BLDG. SIZE: \_\_\_\_\_

BLDG. USE: \_\_\_\_\_